

**THE
UNIVERSITY
OF RHODE ISLAND**

**DIVISION OF
ADMINISTRATION
AND FINANCE**

THINK BIG  WE DO™

PURCHASING DEPARTMENT

10 Tootell Road, Suite 3, Kingston, RI 02881 USA

p: 401.874.2171

f: 401.874.2306

uri.edu/purchasing



DATE: 5/22/23

Addendum # 1

BID NO.: 101270
OPENING: 6/1/23 @ 12:00 PM
COMMODITY: TOOTELL DIVING WELL RESURFACING

Due to the date of issuance of this addendum #1, the bid opening has been rescheduled from 5/25/23 at 2:00 PM to 6/1/23 at 12:00 PM.

This addendum includes the following:

- Document 00900 – Addenda and Modifications
- Addenda Associated Drawing
- Non-Mandatory Pre-Bid Sign-In Sheet

Purchasing Department
The University of Rhode Island

Rev. 9-1-15

DOCUMENT 00900 – ADDENDA AND MODIFICATIONS

ADDENDUM NO. 1 – 5/18/2023

From: Tecton Architects, PC *Home Office:* *Branch Office*

34 Sequassen Street 17 Railroad Avenue
Hartford, CT 06106 Westerly, RI 02891
Tel. 860-5480802 Tel. 401-5967555

To: Prospective Bidders

This Addendum forms part of the Contract Documents and modifies the Bidding Documents dated 4/11/2023 with amendments and additions noted below.

Acknowledge receipt of this Addendum in the space provided in the Bid Form. Failure to do so may disqualify the Bidder.

This Addendum consists of 2 Pages and the following document:
Drawing DP-7 “Diving Envelope and Replacement Ladder”.

CHANGES TO DRAWINGS

- 1. DRAWING #DP-1
Revise last sentence of demolition key-note 8 as follows:
“Remove four (4) existing grab rails. For replacement grab rails see construction notes and drawing DP-7.”
- 2. DRAWING #DP-2
Delete construction key-note 6 and replace with the following:
“Provide and install four (4) new ladders: Standard Crossbrace Plus, Official SR Smith Product. Specifications – Tubing: 1.9” OD, 0.145” wall thickness; Type: 304 stainless steel; Number and material of treads: 5, stainless steel; Radius bends: 6”. Treads shall be set at 1’- 0” o.c. and the dimension between the top tread and the pool deck shall be 1’- 0”. See also drawing DP-7.
- 3. DRAWING #DP-3
Delete details “Grab rail with steps.”
- 4. DRAWING #DP-7
Add attached drawing DP-7 “Diving Envelope and Replacement Ladder”.

CHANGES TO PROJECT MANUAL

None.

END OF ADDENDUM #1


Client/ Contractor

THE UNIVERSITY OF RHODE ISLAND

Project

URI - TOOTELL AQUATIC CENTER DIVING POOL RESURFACING

105 KEANEY ROAD, KINGSTON RI 02881

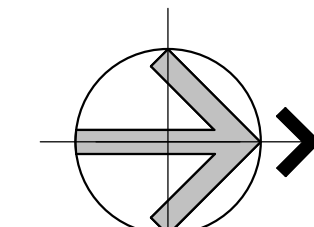

Seals

CONSTRUCTION DOCUMENTS

Issues / Revisions

No.	Date	Description
1	3/31/2023	CONSTRUCTION DOCUMENTS

Drawing Title


DIVING ENVELOPE REPLACEMENT LADDERS

Project Manager: MT	Project No: URI75IN
Project Architect: MT	Production Leader: JR
Project Designer: MT	Peer Reviewer: RA

Drawing Number

DP-7

C:\Users\jyoshaR\Documents\uri75in_Pool Resurfacing_JyoshaR.rvt 3/31/2023 2:44:26 PM

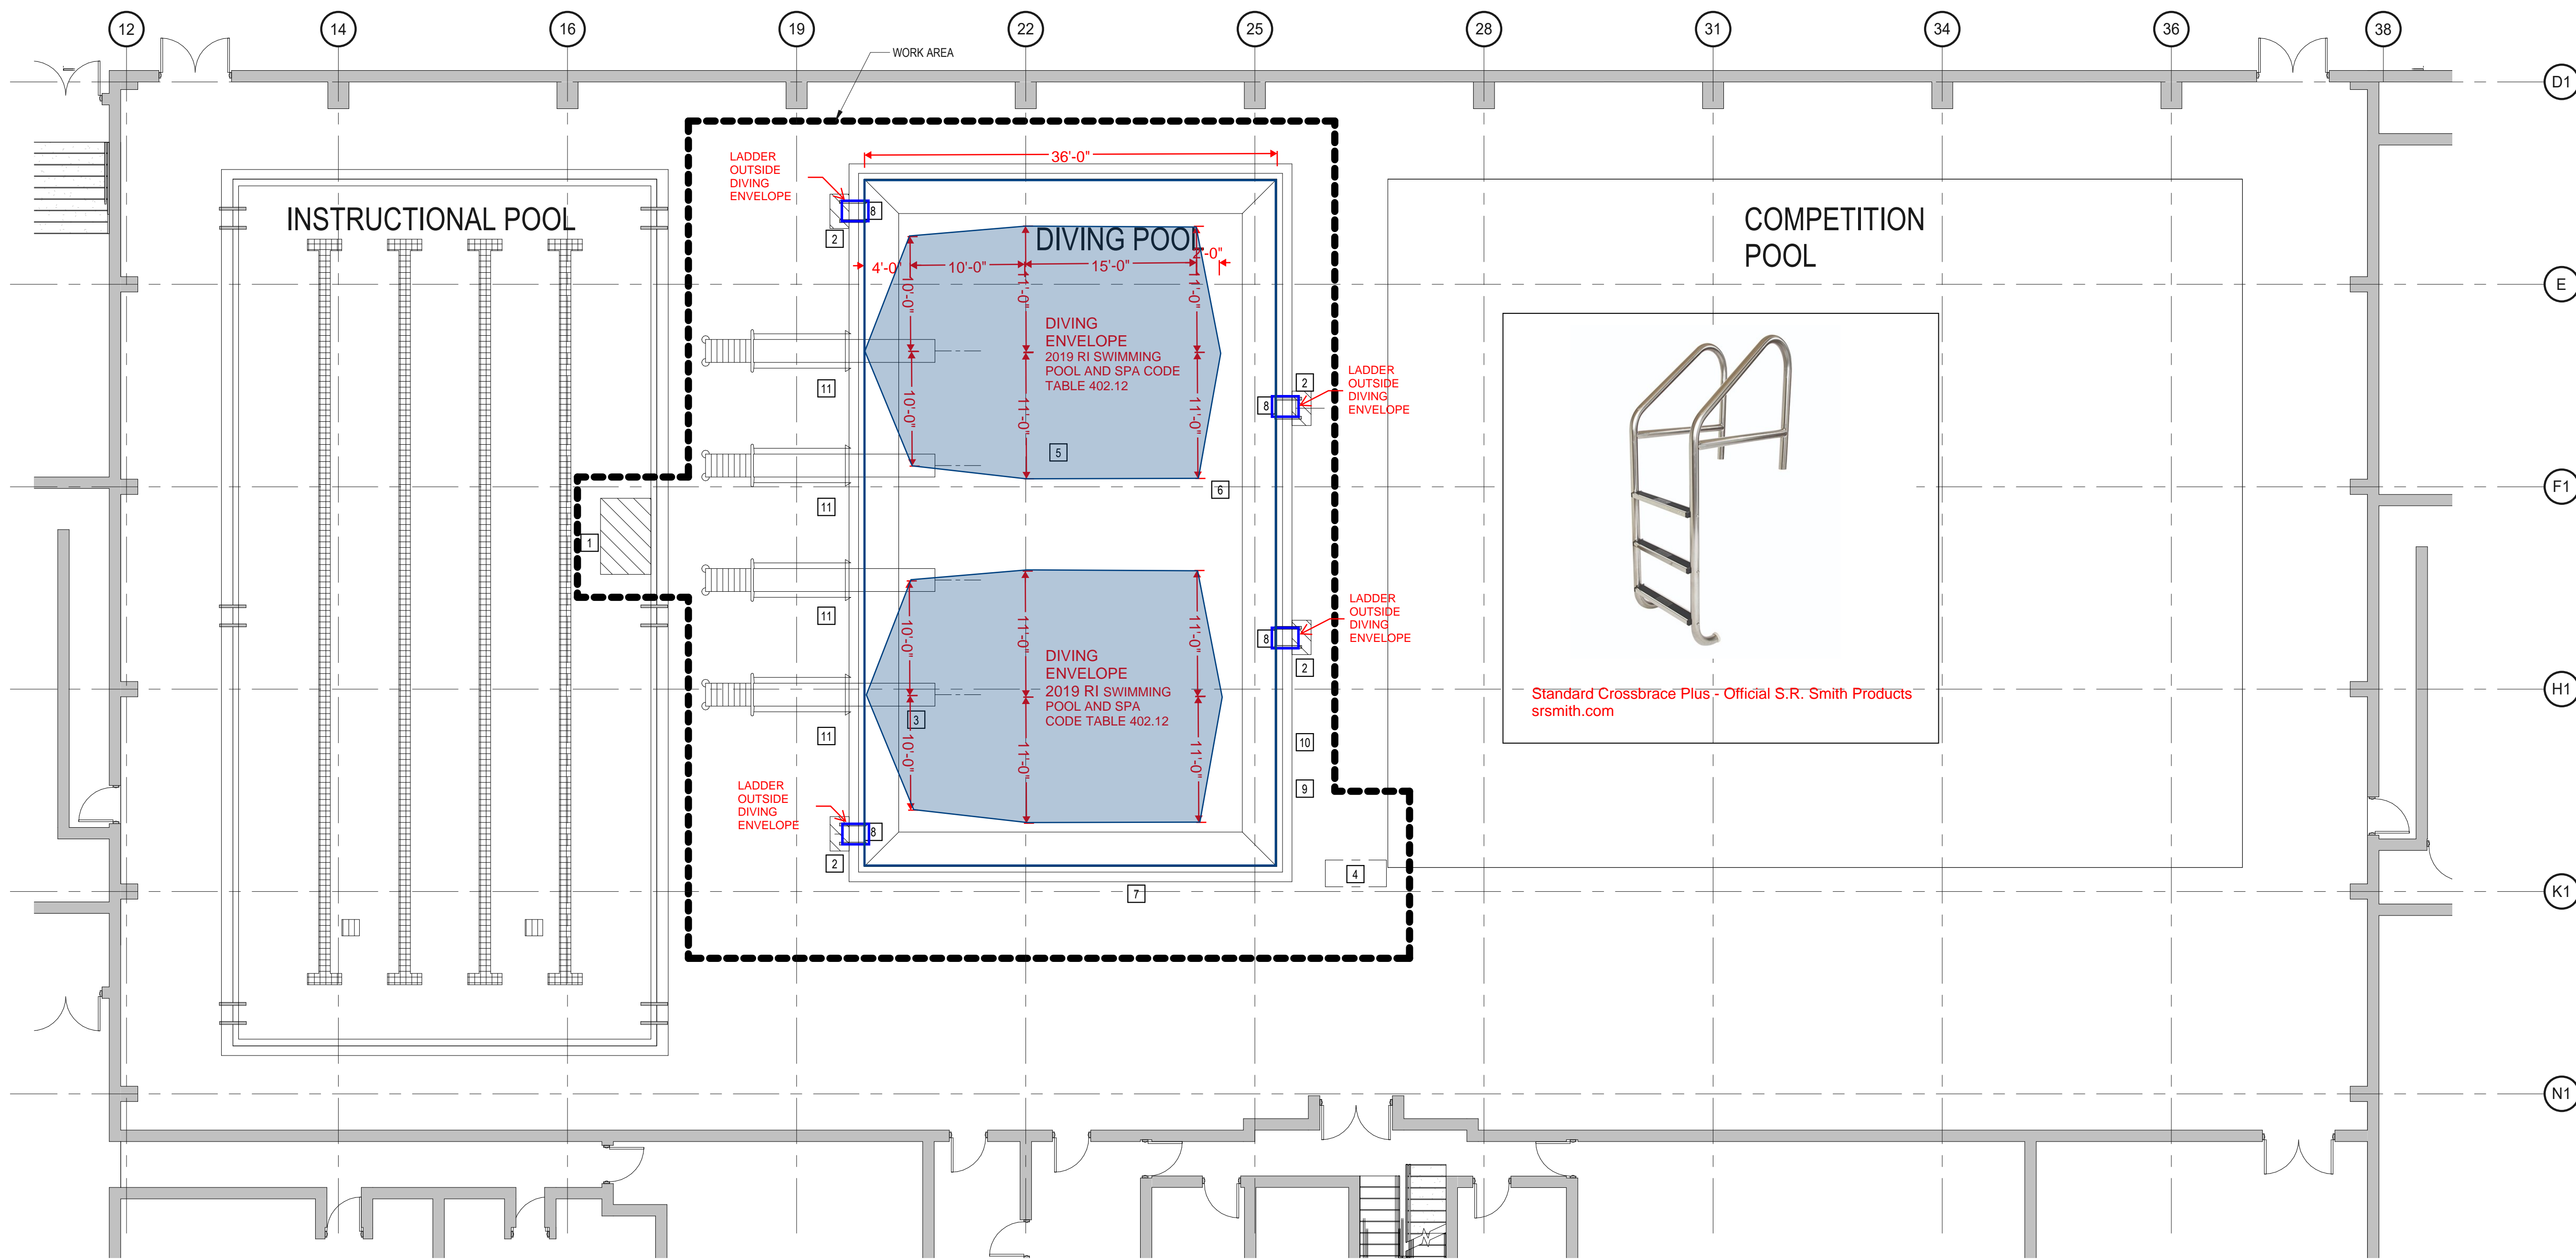

H10 POOL DECK DEMOLITION PLAN
1/8" = 1'-0"



NON - MANDATORY PRE-BID CONFERENCE SIGN-IN SHEET

BID NUMBER:	101270	PURCHASING REPRESENTATIVE:	Andrea Turano
BID TITLE:	TOOTELL DIVING WELL RESURFACING		
LOCATION:	Surge Building, Rm. 168, 1st Floor, 210 Flagg Rd., Kingston, RI 02881		
PRE-BID DATE AND TIME:	Thursday, May 11th, 2023		

Company Name:	Representative:	Email Address:	Phone Number:
URI	Kyle Coleman	Kycoleman@uri.edu	401 500 1064
URI Purchasing	Andrea Turano	andrea_turano@uri.edu	401-874-9133
Weston Sampson	James Elder	eldebj@wsei.nc	978 587-4593
T. Davis Co. Plaster	T. Davis Co. Plaster	DAVID@DCPLASTER.com	860-985-9148
		DC Plaster	